


OHI

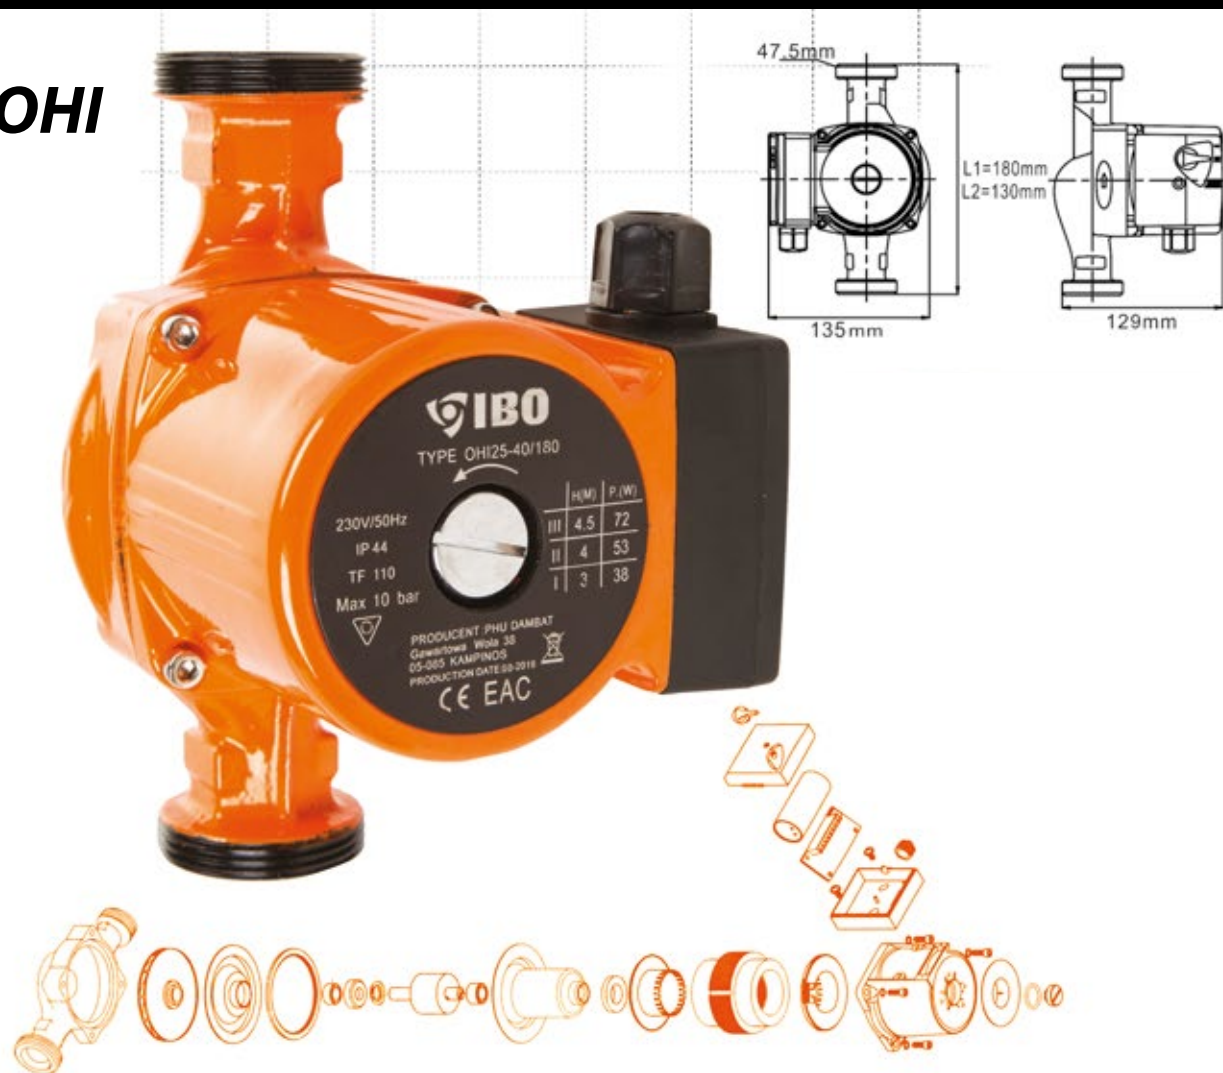

The pumps have 3-speed motors for adjusting operating parameters depending on the user's requirements. The pumps are available with bodies made of bronze or cast iron. Due to the design and high quality materials used, the pumps are very quiet during operation.

All OHI pumps have PZH (National Institute of Hygiene) approval.

PARAMETERS

Name	Speed level	Head (m)	Flow (l/min)	Motor power (W)	Pump inlet/outlet diameter/ Union joint diameter (inch)	Inlet/outlet spacing (mm)
OHI 15-60/130	1	3	22	46	1 x ¾	130
	2	5	38	63		
	3	6	55	93		
OHI 25-40/130	1	3	18	38	1½ x 1	130
	2	4	36	53		
	3	4,5	48	71		
OHI 25-40/180	1	3	18	38	1½ x 1	180
	2	4	36	53		
	3	4,5	48	71		
OHI 25-60/130 OHI 25-60/180	1	3	22	46	1½ x 1	130 180
	2	5	38	63		
	3	6	55	93		
OHI 25-80/180	1	6,5	43	150	1½ x 1	130
	2	7,5	103	220		
	3	8	160	270		
OHI 32-60/180	1	3	22	46	2 x 1¼	180
	2	5	38	63		
	3	6	55	93		
OHI 32-80/180	1	6,5	43	150	2 x 1¼	180
	2	7,5	103	220		
	3	8	160	270		